


Data Sheet


DE-52

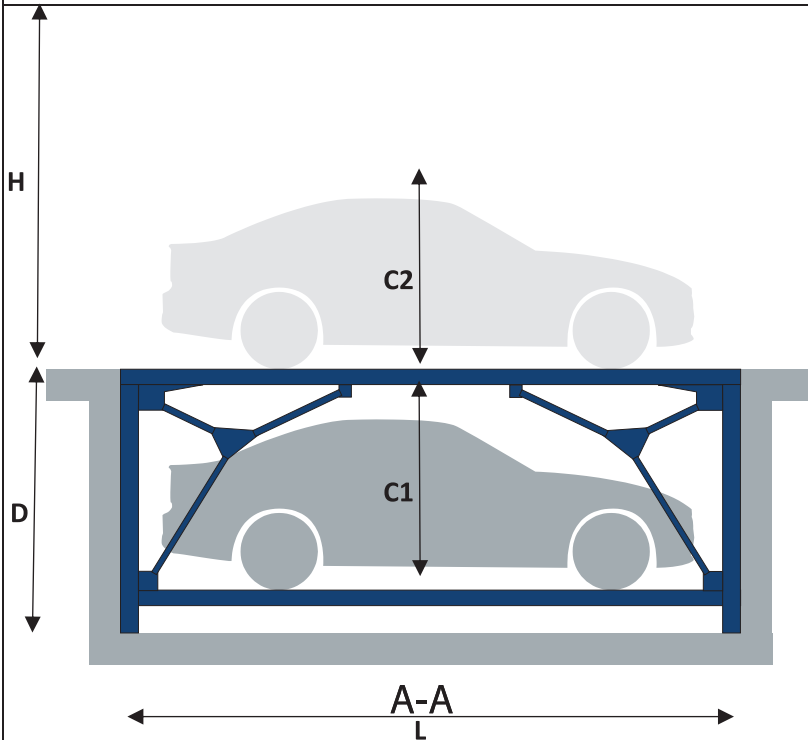

Indented parking system on 2 levels
 Free door opening at all levels
 Underground system.
 4 Column lifting
 No pillars at the entrance top level
 Custom top platform available upon request

All dimensions listed are in centimeter, and consider the minimum required.
 Allowed tolerance 0..+3.


Width dimensions:

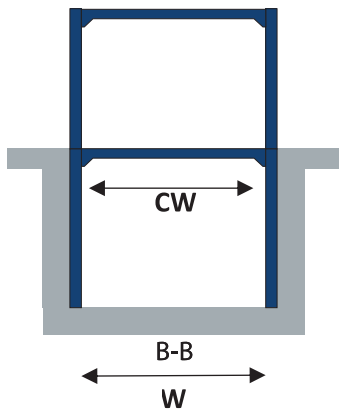

W	CW
265	230
275	240
285	250
295	260
305	270

W: total pit width
 CW: Clear width for car.

Pit Floor:

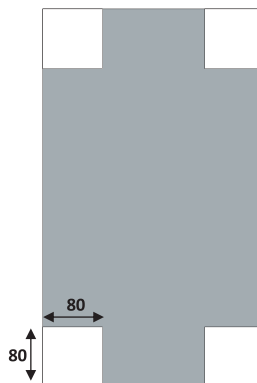

The pit floor should be built according to the drawing above. The four corners with the dimensions 80 x 80 cm and must be even and leveled.

Technician Access:

With using the standard platform, the technicians can access the system with removing the platform.
 In any other case, access way is necessary.

Dimensions:

D	H	C1	C2
200	330	150	150
210	340	160	150
220	350	170	150
230	360	180	150
240	370	190	150
250	380	200	150

L	Car Length (max)
530	510
500	480

D: Pit Depth

H: clear height above entrance level.

C1: clear car height in lower pos. (max)

C2: clear car height in mid. pos. (max)

C3: clear car height in top pos. (max)

Cars weight:

	weight	wheel load
Standard	2000kg (max)	500kg (max)

Electronical requirements per 1 system:

Supply line 5 x 4 mm² (3 PH + N + PE) with marked/numbered wires and protective conductor.
 Fuse: circuit breaker 3 x 32 A (C) or 3 x 25 A (D).
 Hydraulic unit 6,0 kW , three-phase current, 400 V / 50 Hz.



טל 03-6443535
 פקס 03-6443580
 office@interpaz.co.il
 www.interpaz.co.il

אינטרפז
 טכנולוגיות בע"מ

Phone: 0049 (0)341 - 24700 131
 Fax: 0049 (0)341 - 24700 132
 Email: info@de-park.com
 Web: www.de-park.com

