


Data Sheet

DE-53

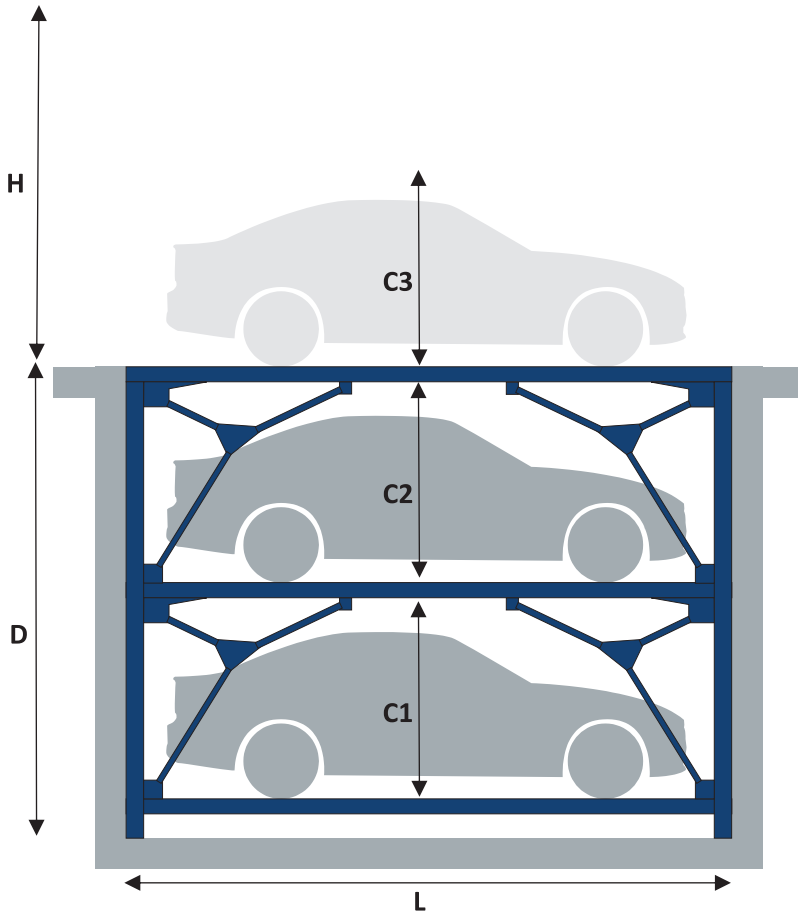

Dimensions:

<u>D</u>	<u>H</u>	<u>C1</u>	<u>C2</u>	<u>C3</u>
350	495	150	150	155
370	515	160	160	155
390	535	170	170	155
410	555	180	180	155
430	575	190	190	155
450	595	200	200	155

<u>L</u>	<u>Car Length (max)</u>
530	510
500	480

All dimensions listed are in centimeter, and consider the minimum required.

Allowed tolerance 0..+3.

D: Pit Depth


H: clear height above entrance level.

C1: clear car height in lower pos. (max)

C2: clear car height in mid. pos. (max)

C3: clear car height in top pos. (max)


Width dimensions:

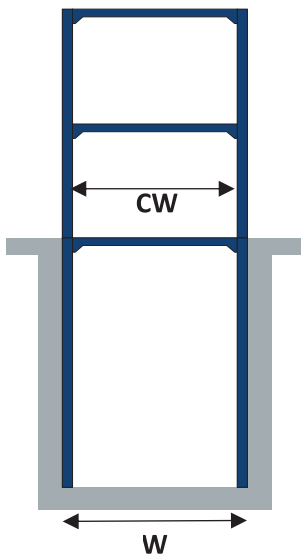

<u>W</u>	<u>CW</u>
265	230
275	240
285	250
295	260
305	270

W: total pit width
CW: Clear width for car.

Pit Floor:

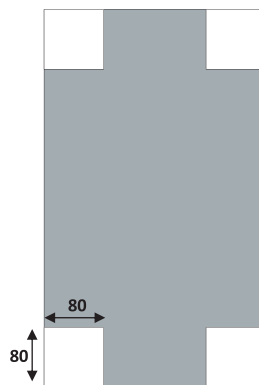

The pit floor should be built according to the drawing above. The four corners with the dimensions 80 x 80 cm and must be even and leveled.

Technician Access:

With using the standard platform, the technicians can access the system with removing the platform.

In any other case, access way is necessary.

Cars weight:

	<u>weight</u>	<u>wheel load</u>
Standard	2000kg (max)	500kg (max)

Electronical requirements per 1 system:

Supply line 5 x 4 mm² (3 PH + N + PE) with marked/numbered wires and protective conductor.
Fuse: 3 x fuse 25 A (slow) or circuit breaker 3 x 25 A (K or C).

Hydraulic unit 6,0 kW , three-phase current, 400 V / 50 Hz.



טל. 03-6443535
פקס. 03-6443580
office@interpaz.co.il
www.interpaz.co.il



Phone: 0049 (0)341 - 24700 131
Fax: 0049 (0)341 - 24700 132
Email: info@de-park.com
Web: www.de-park.com

